

CCS1-CCS2 DC Adapter

CCS1 to CCS2 DC Adapter



front




after



top





bottom

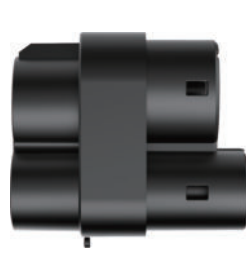

side

Parameter/specification sheet


Rated current:250ADC	Conductor: copper alloy, silver plated surface
Rated voltage:1000VDC	Working environment temperaturelated: -30°C- +50°C
Contact impedance:0.5 mΩ Max	Terminal temperature riseture: <50K
Fireproof grade of rubber shell:UL94V-0	Insertion and Extraction Force: <100N
Waterproof grade: IP54(mating)	weight: 0.49kg
Plastic shell: thermoplastic plastic	size: 112.9*100.22*69.6mm

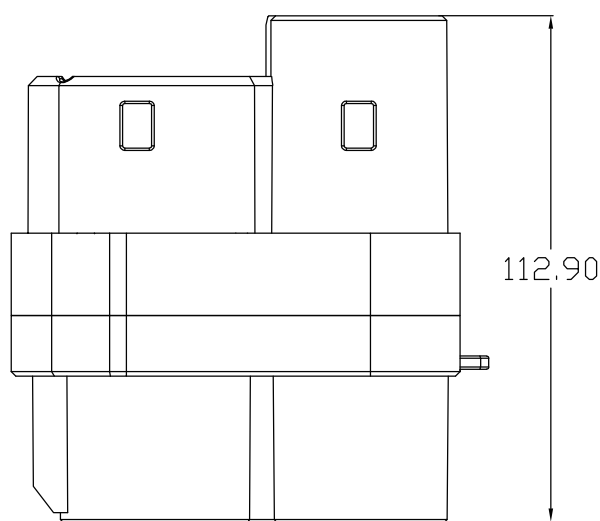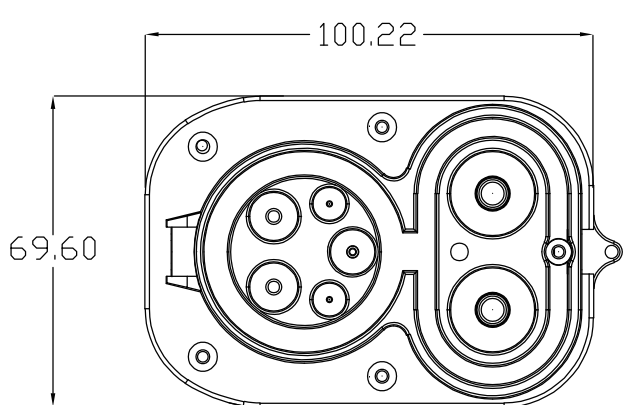


usage method



Box specifications/weight, quantity, size

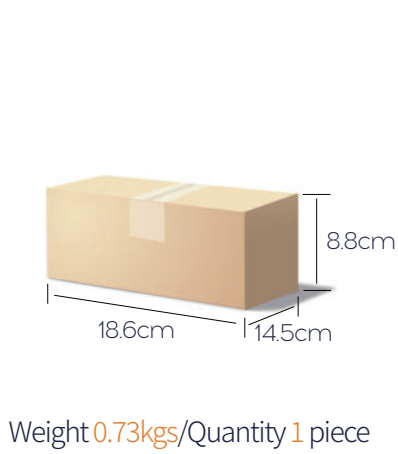

Weight 0.73kgs/Quantity 1 piece

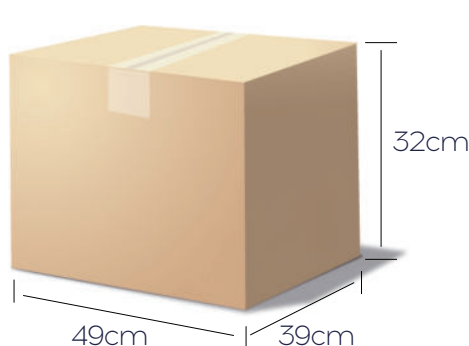

Weight 14.6kgs/Quantity 20 piece

Product packaging



instructions

